

NIPPON THOMPSON CO., LTD. (JAPAN)

Head Office : 19-19, Takanawa 2-chome, Minato-ku,
Tokyo, 108-8586, Japan
Phone : +81 (0)3-3448-5850
Fax : +81 (0)3-3447-7637
E-mail : ntt@ikonet.co.jp
URL : <https://www.ikont.co.jp/eg/>
Plant : Gifu, Kamakura



IKO INTERNATIONAL, INC. (U.S.A.)

East Coast Operations (Sales Head Office)

91 Walsh Drive,
Parsippany, NJ, 07054,
U.S.A.
Phone : +1-973-402-0254
Toll Free : +1-800-922-0337
Fax : +1-973-402-0441
E-mail : eco@ikonet.co.jp



Midwest Operations

101 Mark Street, Unit-G,
Wood Dale, IL, 60191,
U.S.A.
Phone : +1-630-766-6464
Toll Free : +1-800-323-6694
Fax : +1-630-766-6869
E-mail : mwo@ikonet.co.jp

Minnesota Sales Office

1500 McAndrews Road West, Suite 210,
Burnsville, MN, 55337,
U.S.A.
Phone : +1-952-892-8415
Toll Free : +1-800-323-6694
Fax : +1-952-892-1722
E-mail : mwo@ikonet.co.jp

West Coast Operations

9830 Norwalk Boulevard, Suite 198,
Santa Fe Springs, CA, 90670,
U.S.A.
Phone : +1-562-941-1019
Toll Free : +1-800-252-3665
Fax : +1-562-941-4027
E-mail : wco@ikonet.co.jp

Silicon Valley Sales Office

1500 Wyatt Drive, Suite 10,
Santa Clara, CA, 95054,
U.S.A.
Phone : +1-408-492-0240
Toll Free : +1-800-252-3665
Fax : +1-408-492-0245
E-mail : wco@ikonet.co.jp

Southeast Operations

3235 Satellite Boulevard Building 400, Suite 230,
Duluth, GA, 30096,
U.S.A.
Phone : +1-770-418-1904
Toll Free : +1-800-874-6445
Fax : +1-770-418-9403
E-mail : seo@ikonet.co.jp

Southwest Operations

8105 N. Beltline Road, Suite 130,
Irving, TX, 75063,
U.S.A.
Phone : +1-972-929-1515
Toll Free : +1-800-295-7886
Fax : +1-972-915-0060
E-mail : swo@ikonet.co.jp

IKO THOMPSON BEARINGS CANADA, INC.(CANADA)

731-2425, Matheson Boulevard East, 7th floor,
Mississauga, Ontario, L4W 5K4, Canada
Phone : +1-905-361-2872
Fax : +1-905-361-6401
E-mail : itc@ikonet.co.jp

IKO BRASIL SERVIÇOS EMPRESARIAIS EIRELI (BRAZIL)

Rua Frei Caneca 1407,
Condominio Edifício Barão de Monte Cedro,
Cjs. 801/802, Consolação, São Paulo- SP
Cep: 01307-909
Phone : +55 (0)11-2366-3033
E-mail : itb@ikonet.co.jp

NIPPON THOMPSON EUROPE B.V. (EUROPE)

The Netherlands (Sales Head Office)

Keersopstraat 35,
3044 EX, Rotterdam,
The Netherlands
Phone : +31 (0)10-462 68 68
E-mail : nte@ikonet.co.jp



Germany Branch

Mündelheimer Weg 54,
40472 Düsseldorf,
Germany
Phone : +49 (0)211-41 40 61
Fax : +49 (0)211-42 76 93
E-mail : ntd@ikonet.co.jp

Regensburg Sales Office

Im Gewerbepark D 30,
93059 Regensburg,
Germany
Phone : +49 (0)941-20 60 70
Fax : +49 (0)941-20 60 719
E-mail : ntdr@iko-nt.de

Neunkirchen Sales Office

Gruben Str. 95c,
66540 Neunkirchen,
Germany
Phone : +49 (0)6821-99 98 60
Fax : +49 (0)6821-99 98 626
E-mail : ntdn@iko-nt.de

U.K. Branch

2 Vincent Avenue, Crownhill,
Milton Keynes, Bucks, MK8 0AB,
United Kingdom
Phone : +44 (0)1908-566144
E-mail : sales@iko.co.uk

Spain Branch

Autovia Madrid-Barcelona, Km. 43,700
Polig. Ind. AIDA - Nove A-8, Ofic. 2-1^a
19200-Azuqueca de Henares,
(Guadalajara) Spain
Phone : +34 949-26 33 90
Fax : +34 949-26 31 13
E-mail : nts@ikonet.co.jp

France Branch

Bâtiment le Raphaël-Paris, Nord 2,
22 avenue des Nations
BP54394 Villepinte
95943 ROISSY C.D.G Cedex
France
Phone : +33 (0)1-48 16 57 39
Fax : +33 (0)1-48 16 57 46
E-mail : ntf@ikont.eu

IKO THOMPSON ASIA CO., LTD. (THAILAND)

1-7 Zuellig House, 3rd Floor,
Silom Road, Silom, Bangrak,
Bangkok 10500, Thailand
Phone : +66 (0)2-637-5115
Fax : +66 (0)2-637-5116
E-mail : ita@ikonet.co.jp

IKO THOMPSON KOREA CO.,LTD. (KOREA)

201, Worldvision Bldg., 77-1, Yeouinaru-ro,
Yeongdeungpo-gu, Seoul, Korea
Phone : +82 (0)2-6337-5851
Fax : +82 (0)2-6337-5852
E-mail : itk@ikonet.co.jp

IKO-THOMPSON (SHANGHAI) LTD. (CHINA)

Shanghai (Sales Head Office)

1608-10, MetroPlaza No.555, LouShanGuan
Road, ChangNing District, Shanghai,
People's Republic of China, 200051
Phone : +86 (0)21-3250-5525
Fax : +86 (0)21-3250-5526
E-mail : ntc@ikonet.co.jp

Beijing Branch

Room 1909, Tower C Oriental Media Center,
Guanghua Road No. 4 Chaoyang District, Beijing,
People's Republic of China, 100026
Phone : +86 (0)10-6515-7681
Fax : +86 (0)10-6515-7689
E-mail : ntc@ikonet.co.jp

Guangzhou Branch

Room 834, Garden Tower, Garden Hotel
368 Huanshi East Road, Yuexiu District, Guangzhou,
Guangdong
People's Republic of China, 510064
Phone : +86 (0)20-8384-0797
Fax : +86 (0)20-8381-2863
E-mail : ntc@ikonet.co.jp

Wuhan Branch

Room 2300, Truroll Plaza No.72, Wusheng Road,
Qiao kou District, Wuhan, Hubei,
People's Republic of China, 430033
Phone : +86 (0)27-8556-1610
Fax : +86 (0)27-8556-1630
E-mail : ntc@ikonet.co.jp

Shenzhen Branch

Room1808, KEENSTAR Building 18,
Chuangye 2nd Rd 248, Bao'an, Shenzhen, Guangdong,
People's Republic of China, 518081
Phone : +86 (0)755-2265-0553
Fax : +86 (0)755-2298-0665
E-mail : ntc@ikonet.co.jp

Xian Branch

Room 2010, Block B, Chaoyang International Plaza,
No. 166,
Changle West Road, Xincheng District Xi'an, Shanxi,
People's Republic of China, 710032
Phone : +86 (0)29-8323-5915
E-mail : ntc@ikonet.co.jp

Ningbo Office

Room 3406, Zhongnongxin Building, No.181,
Zhongshan East Road, Haishu Ward, Ningbo,
Zhejiang
People's Republic of China, 315000
Phone : +86 (0)574-8718-9535
Fax : +86 (0)574-8718-9533
E-mail : ntc@ikonet.co.jp

Qingdao Office

Room 1111, Building 9, Qingdao Science and
Technology City, No. 7 Wuyang Road,
North District, Qingdao City, Shandong,
People's Republic of China, 266045
Phone : +86 (0)532-8670-2246
Fax : +86 (0)532-8670-2242
E-mail : ntc@ikonet.co.jp

Shenyang Office

2-1203 Tower I, City Plaza Shenyang NO.206,
Nanjing North Street, Heping District, Shenyang,
People's Republic of China, 110001
Phone : +86 (0)24-2334-2662
Fax : +86 (0)24-2334-2442
E-mail : ntc@ikonet.co.jp


IKO

New

Micro Linear Way L

LWLF2

The smallest size available in the
Linear Way L Series (wide rail type)

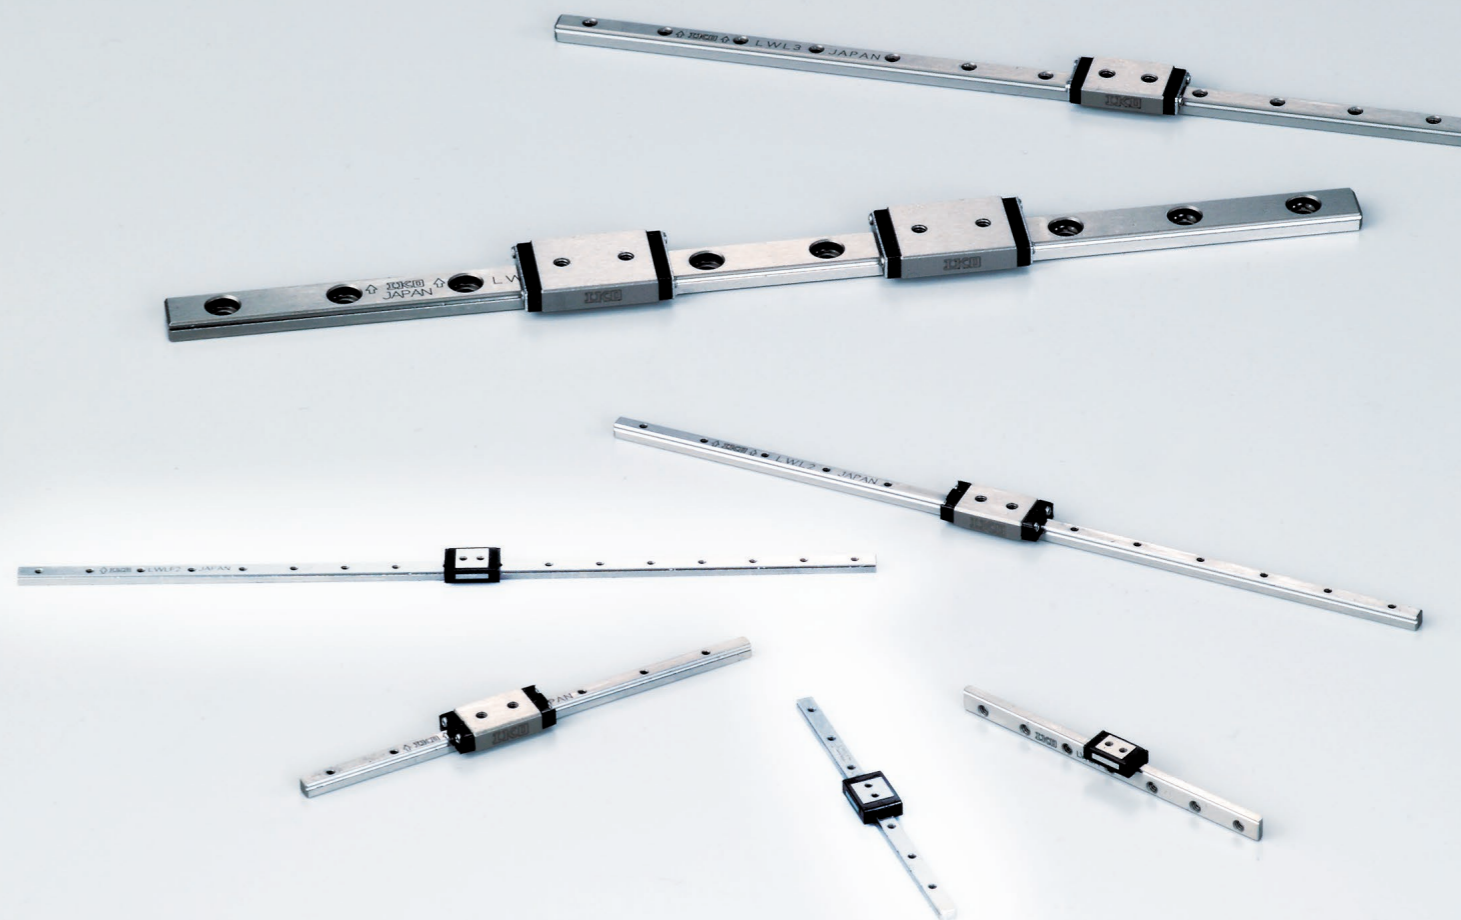


• The specifications and dimensions of products in this catalog are subject to change without prior notice. • When these products are exported, the exporter should confirm a forwarding country and a use, and, in case of falling under the customer's requirements, take necessary procedures such as export permission application. • Although all data in this catalog has been carefully compiled to make the information as complete as possible, NIPPON THOMPSON CO., LTD. shall not be liable for any damages whatsoever, direct or indirect, based upon any information in this catalog. NIPPON THOMPSON CO., LTD. makes no warranty, either express or implied, including the implied warranty of merchantability or fitness for a particular purpose. • Reproduction and conversion without permission are prohibited.




ISO 9001 & 14001 Quality system registration certificate

HIGH PRECISION AND ULTRA SMALL SIZE

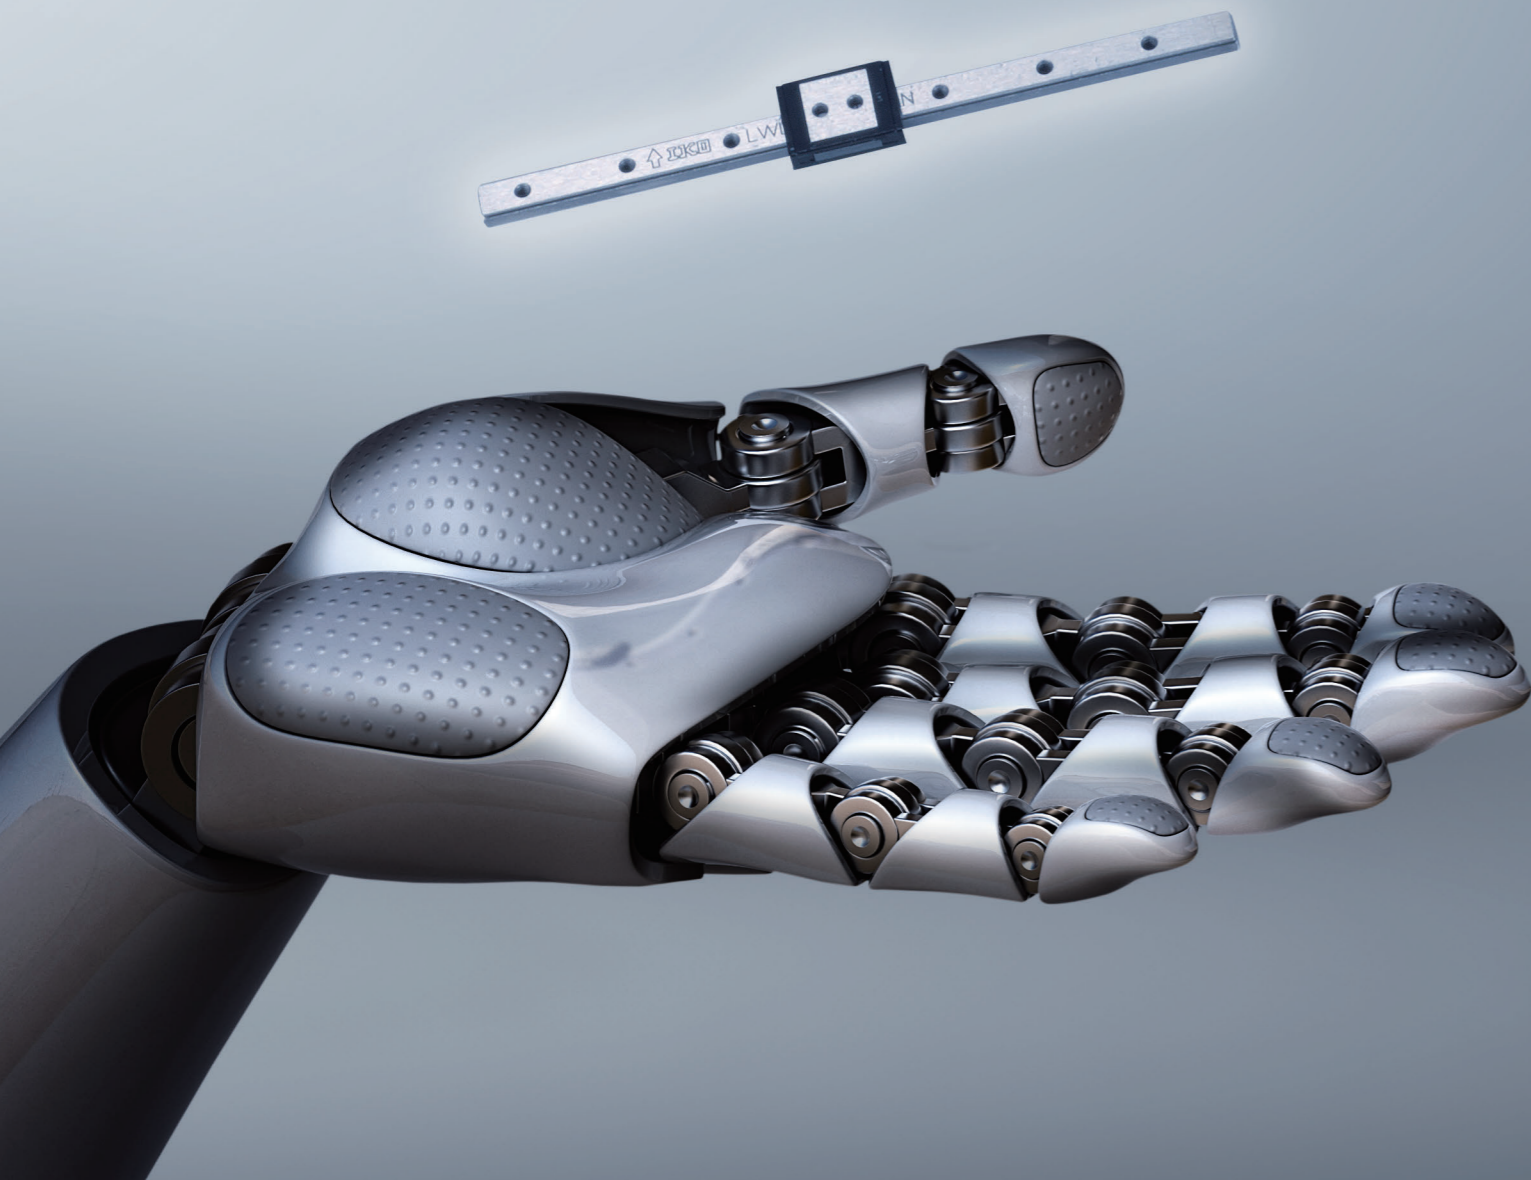

Structure

Ultra-small linear motion rolling guide produced by original miniature technology. Despite its very small body, and thanks to the structure with two rows of balls that contact with the raceway at four points, stable accuracy and rigidity can be achieved even in applications where load has variable direction and size or complex load is applied.

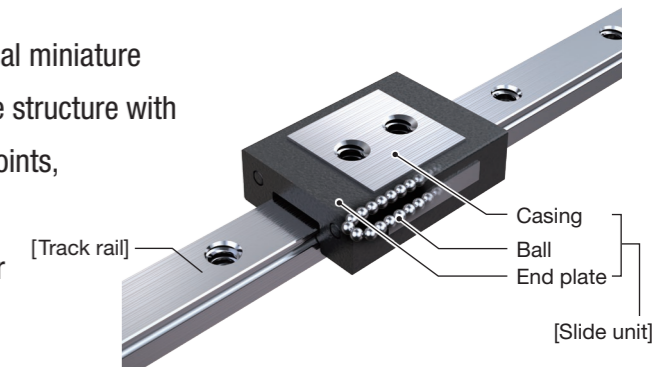

Features

1

Simple assembly


A tapped rail (mounted from the bottom) is used as the track rail for stability.



2

Ultra-small size

Original miniature technology provides the lowest sectional height in the industry.

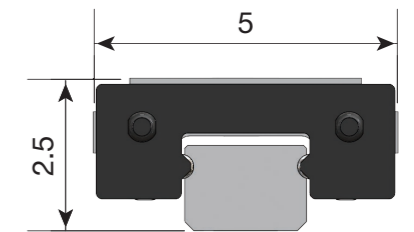


3

Stainless steel for excellent corrosion resistance

Stainless steel, which is highly resistant to corrosion, is used as the basic specification, making these products suitable for applications where rust prevention oil is not preferred, such as in a cleanroom environment.





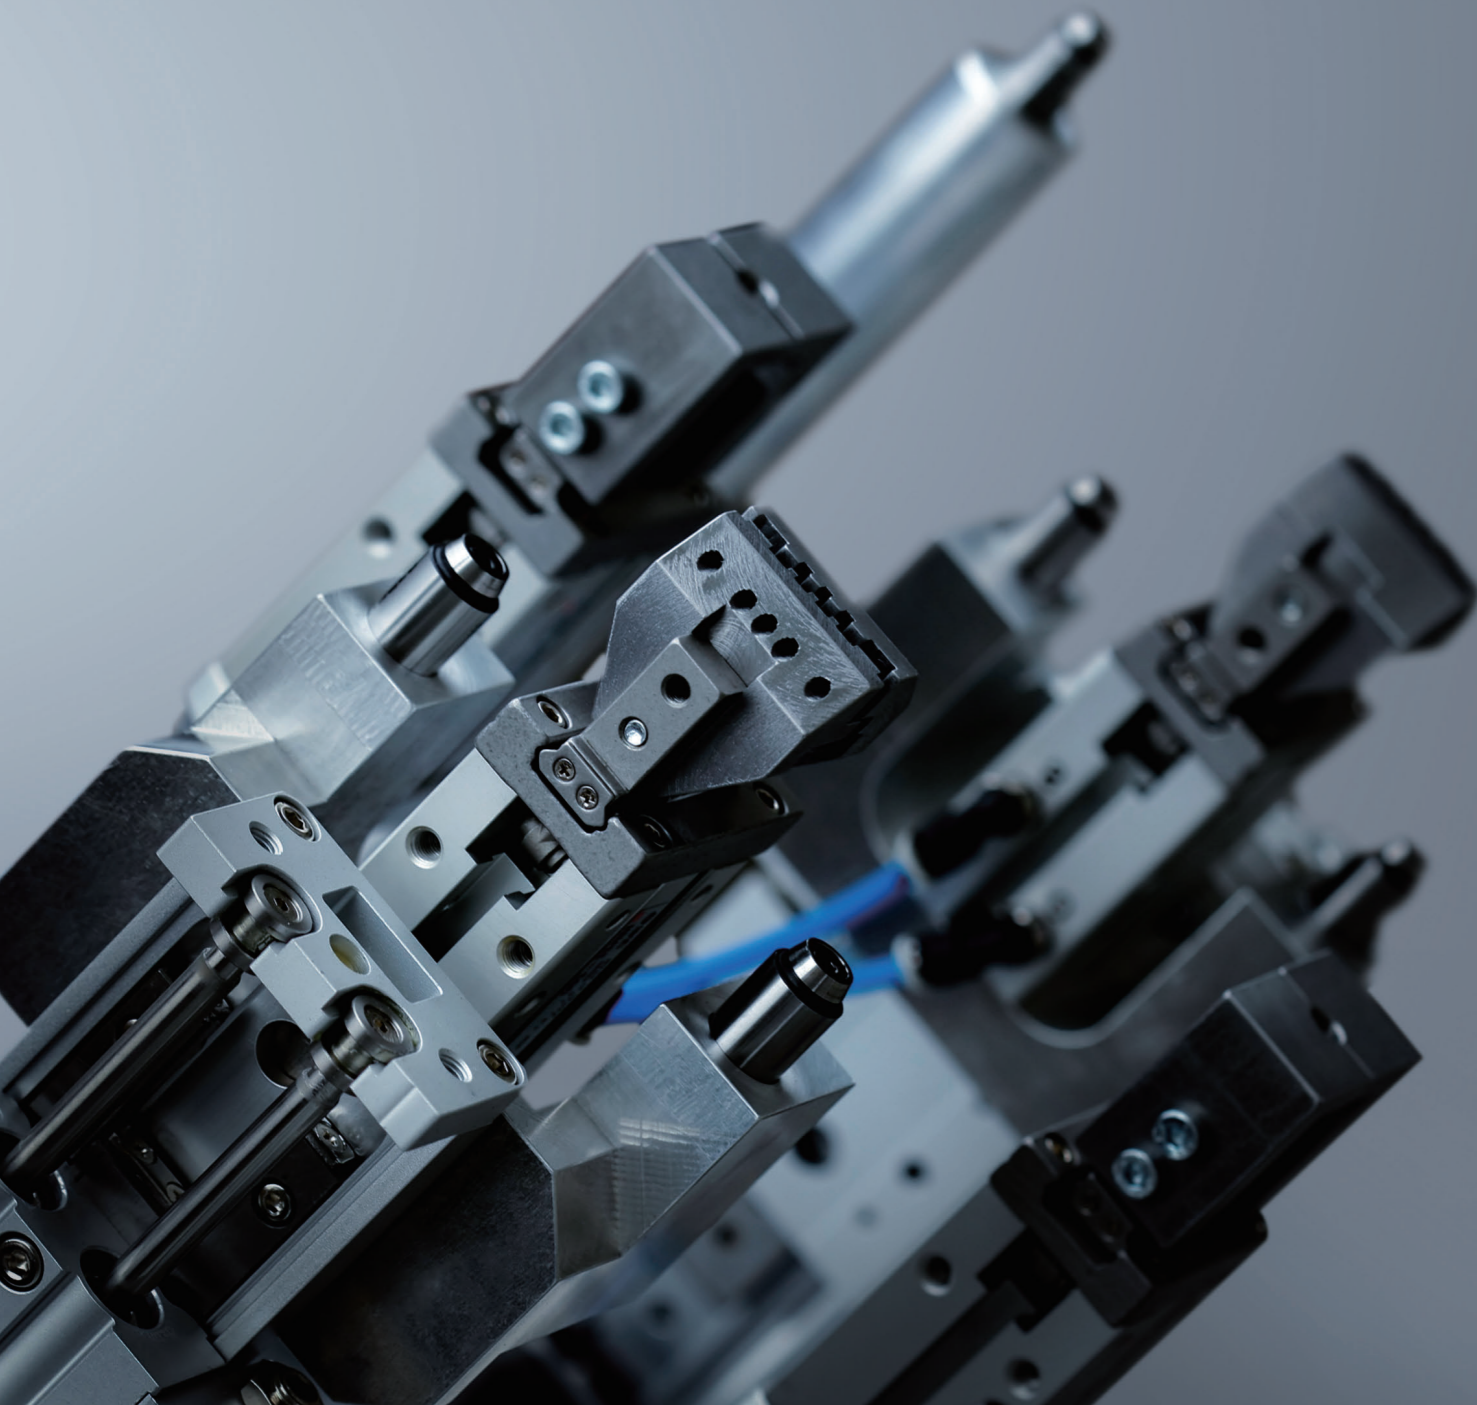

FOR VARIOUS USES INCLUDING A GRIPPER



Models and Sizes

Shape	Length of slide unit	Model	Size										
			1 ⁽¹⁾⁽²⁾	2 ⁽¹⁾⁽³⁾	3 ⁽¹⁾⁽³⁾	5	7	9	12	15	20	25	
 Standard type	Short 	LWLC	—	—	☆	☆	☆	☆	☆	☆	☆	☆	☆
	Standard 	LWL	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	Long 	LWLG	—	—	—	—	☆	☆	☆	☆	☆	☆	☆

Shape	Length of slide unit	Model	Size									
			2 ⁽¹⁾⁽³⁾	4 ⁽¹⁾	6 ⁽¹⁾	10	14	18	24	30	42	
 Wide rail type	Short 	LWLFC	—	—	☆	☆	☆	☆	☆	☆	☆	☆
	Standard 	LWLF New	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
	Long 	LWLFG	—	—	—	—	☆	☆	☆	☆	☆	☆


Notes (1) Balls are not retained. No end seal is attached.





(2) Either tapped rail specification (mounted from lateral) or solid rail specification is used for the track rail.

(3) Tapped rail specification (mounted from bottom) is used for the track rail.

Remark:  shows that there is interchangeable specification that allows free combination between slide units and track rails.

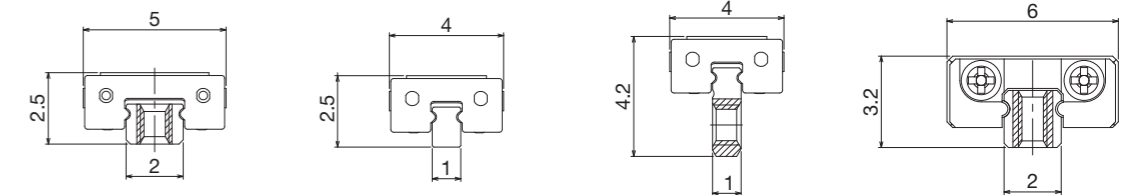Micro Linear Way Specification Comparison



Identification number	New LWLF2	LWL1	LWL1...Y	LWL2	
Total height	2.5	2.5	4.2	3.2	
Width	Slide unit [mm]	5	4	6	
	Track rail [mm]	2	1	1	2
Mass	Slide unit [g]	0.21	0.16	0.16	0.9
	Track rail (per 100mm) [g]	2.0	1.0	2.1	2.8
Track rail model	Tapped rail specification mounted from bottom 	Solid rail specification (no mounting hole) 	Tapped rail specification mounted from lateral 	Tapped rail specification mounted from bottom 	
Basic dynamic load rating C [N]	66.8	66.8	66.8	221	
Basic static load rating C_0 [N]	113	113	113	381	
Static moment rating	T_0 [N·m]	0.12	0.06	0.06	0.42
	T_x [N·m]	0.07	0.07	0.07	0.54
	T_y [N·m]	0.09	0.09	0.09	0.64
Features	Compact at the same sectional height as LWL1, with excellent track rail mounting	The smallest Linear Way with a track rail width of only 1mm	Simple track rail mounting with the same width as LWL1	Minimal size with excellent load capacity	

Identification number

Example	LWLF	2	C1	R18	T ₀	H	/I
	1	2	3	4	5	6	7

1 Model

Model	
LWLF	Wide rail type

2 Size

Size	
2	

3 Number of slide units

Number of slide units (CO)	
Specifies the number of slide units assembled on one track rail.	

4 Length of track rail

Length of track rail (RO)	
Indicates the length of track rail in mm. For standard and maximum lengths, see Table 1.	

5 Preload amount

Preload amount	
T ₀ : Clearance	For details of the preload amount, see Table 2.

6 Accuracy class

Accuracy class	
H: High	For details of accuracy class, see Table 3.
P: Precision	

7 Special Specification

Special Specification	
/E	Specified rail mounting hole positions
/I	Inspection sheet
/W	A group of multiple assembled sets

Details of specifications

Table 1 Standard and maximum lengths of track rail
unit: mm

Item	Identification number	LWLF2
Standard length L ⁽¹⁾		18 (3)
		30 (5)
		42 (7)
		54 (9)
Pitch of mounting holes F		6
E		3
Standard E dimensions	or higher	2.5
	below	5.5
Maximum length		102

Note (1) The value in () indicates the number of mounting holes.

Remark: If not directed, E dimensions for both ends will be the same within the range of standard E dimensions. To change the dimensions, indicate the specified rail mounting hole positions /E of special specification.

Table 2 Preload amount
unit: mm

Preload type (preload symbol)	Clearance (T ₀)
Preload amount [N]	0 ⁽¹⁾
Operating conditions	Very light motion

Note (1) Zero or minimal clearance.

Table 3 Tolerance and allowance





Fig. 1 Parallelism in operation

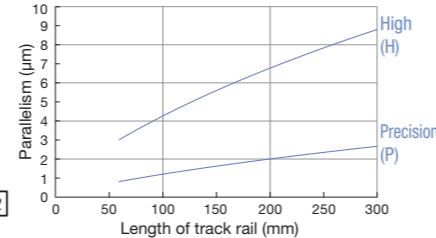

Item	Class (classification symbol)	High (H)	Precision (P)
H deviation		±0.020	±0.010
NI and N2 deviation		±0.025	±0.015
H deviation variation ⁽¹⁾		0.015	0.007
N deviation variation ⁽¹⁾		0.020	0.010
Parallelism in operation of the slide unit C surface to A surface		See Fig. 1. (If the track rail length is less than 60mm, the value will be the same as 60mm)	
Parallelism in operation of the slide unit D1 (D2) surface to B surface		See Fig. 1. (If the track rail length is less than 60mm, the value will be the same as 60mm)	

Note (1) The value shows variation of slide units incorporated in the same track rail.

Mounting methods

Properly align the reference mounting surface B and D1 or D2 of the track rail and slide unit with the reference mounting surface of the table and bed, and fix them in place.

The reference mounting surfaces B and D1, and D2 and mounting surfaces A and C are precisely ground. Machining the mating mounting surface (of the machine, device, etc.) to a high degree of accuracy and mounting them properly will ensure stable linear motion with high accuracy.

The track rail reference mounting surface B is identified by the mark on the top surface of the track rail. It is the side surface above the mark (in the direction of the arrow).



The reference mounting surface of the slide unit is located at both right and left sides (D1 and D2).

It is recommended to add a shoulder to the mating reference mounting surface as shown in the figure to the right. The shoulder height of the track rail should be set to a position (height) where it does not interfere with the slide unit.

The recommended screw tightening torque when mounting the product to a steel mating member material is shown in the table below.


It is recommended to use a tightening torque of 70 to 80% of the value in the table for slide unit mounting holes.

Bolt size	Tightening torque N·m
	Stainless steel-made screw
M1 × 0.25	0.04

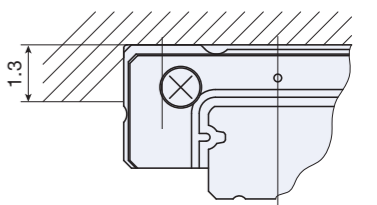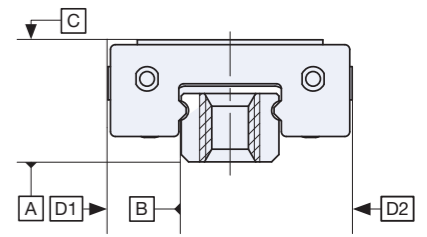

Mounting part of slide unit

Product dimensions

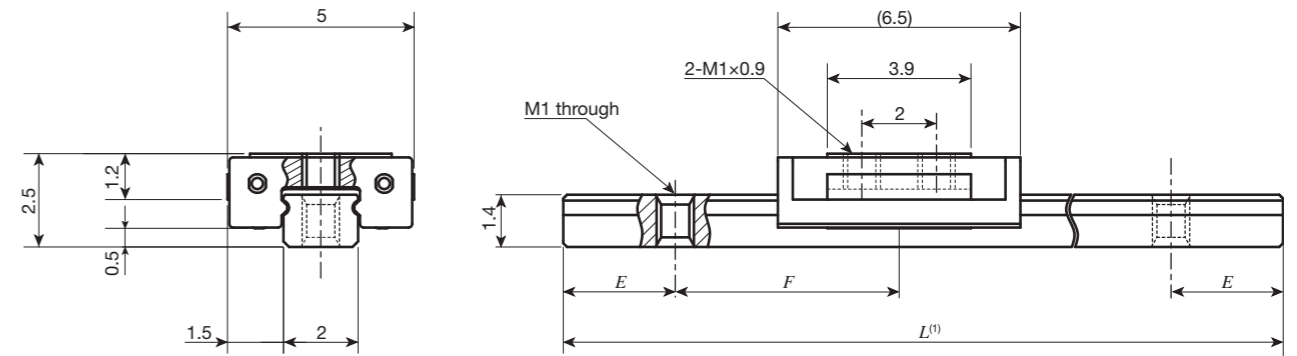

Identification number	Mass (Ref.)		Mounting bolt for track rail mm ⁽²⁾	Basic dynamic load rating ⁽³⁾ C N	Basic static load rating ⁽³⁾ C ₀ N	Static moment rating ⁽³⁾		
	Slide unit g	Track rail (per 100mm) g				T ₀ N·m	T _x N·m	T _y N·m
LWLF2	0.21	2.0	M1 × □ ⁽⁴⁾	66.8	113	0.12	0.07 0.47	0.09 0.56

Note (1) The dimensions of track rail are described in Table 1.

(2) Track rail mounting bolts are not appended.

(3) The directional values for basic dynamic load rating (C), basic static load rating (C₀), and static moment rating (T₀, T_x, T_y) are shown in the figures below.

The upper values of T_x and T_y are for one slide unit, and the lower values are for two slide units in close contact.

(4) Concerning screw length □, prepare the screws whose fixing thread depth is less than the track rail height dimension.

Remarks (1) Balls are not retained. No end seal is attached.

(2) No oil hole is prepared. For re-greasing, apply the grease directly to the raceway of the track rail.

